



metrovancover

Greater Vancouver Regional District • Greater Vancouver Water District

Greater Vancouver Sewerage and Drainage District • Metro Vancouver Housing Corporation

4330 Kingsway, Burnaby, BC, Canada V5H 4G8 604-432-6200 www.metrovancover.org

Policy & Planning Department, Regulation & Enforcement Division, Telephone: 604-432-6200 Fax: 604-436-6707

PERMIT GVA0550

Pursuant to
Greater Vancouver Regional District Air Quality Management Bylaw No. 1082, 2008
and BC Environmental Management Act

Transcontinental Printing 2005 G.P.

located at
725 Hampstead Close, Delta, British Columbia V3M 6R6

is authorized to discharge air contaminants to the air from a
Paper printing plant

located at the above address, subject to the requirements in this Permit.

Contravention of any of these requirements is a violation of the bylaw
and may result in enforcement action.

Print Date: December 02, 2009

Date Issued: February 04, 1994
Date Ammended: DEC 14 2009
(most recent)


R.H. Robb, District Director
Permit GVA0550

GREATER VANCOUVER REGIONAL DISTRICT AIR QUALITY MANAGEMENT PERMIT

SECTION 1 – AUTHORIZED EMISSION SOURCES

Authorization to discharge air contaminants from the authorized Emission Sources and Works listed below are subject to the specified terms and conditions.

Approximate locations of the emission sources are shown on the Site Plan in section 4.

EMISSION SOURCE 01: #1 Harris NC400B heatset web offset press with a TEC Systems 2-CP-271-40 dryer discharging through a Stack.

MAXIMUM EMISSION FLOW RATE: 155 m³/min
MAXIMUM ANNUAL OPERATING HOURS: 8760 hrs/yr
MAXIMUM PRIMARY BURNER INPUT FIRING RATE: 9.37 GJ/hr
MAXIMUM AFTERBURNER INPUT FIRING RATE: 1.82 GJ/hr

MAXIMUM EMISSION QUALITY:

1. 102 mg/m³ Total Hydrocarbons
2. 50 mg/m³ Particulate Matter
3. 10% Opacity
4. Odour: None past the plant boundary such that the District Director determines that pollution has occurred.

WORKS AND PROCEDURES:

TEC Systems Quantum 4000 catalytic incinerator and related appurtenances together with good operating practices.


The results of all catalyst tests, performed to determine catalyst activity, shall be submitted to the District Director as they become available.

The incinerator temperatures shall be taken at a location which has received prior approval by the District Director and shall be continuously monitored in a conveniently visible location. The Permittee shall calibrate this temperature measurement system at the discretion of, and in a manner acceptable to, the District Director.

The Permittee shall maintain a log of inspections and maintenance conducted on the incinerators described in this Permit. This log shall be kept available for inspection for a minimum period of two years.

MINIMUM INCINERATOR EXIT TEMPERATURE: 340 °C

Date Issued: February 04, 1994
Date Amended: DEC 14 2009
(most recent)


R.H. Robb, District Director
Permit GVA0550

GREATER VANCOUVER REGIONAL DISTRICT AIR QUALITY MANAGEMENT PERMIT

EMISSION SOURCE 03: #1 Harris NC400B heatset web offset press with a TEC Systems 2-CP-271-40 dryer emergency bypass discharging through a Stack.

MAXIMUM EMISSION FLOW RATE: **None except in the event of an emergency shutdown.**
MAXIMUM ANNUAL OPERATING HOURS: **0 hrs/yr** (See Works & Procedures)

MAXIMUM EMISSION QUALITY:

WORKS AND PROCEDURES:

Two bypass stacks. Good operating practices. No contaminants shall be emitted from this source into the atmosphere except in the event of an emergency shutdown of the TEC Systems Quantum 4000 catalytic incinerator authorized for Emission Number 01.

EMISSION SOURCE 07: #1 Man Roland Lithoman-3-IN heatset web offset printing press discharging through a Stack.

MAXIMUM EMISSION FLOW RATE: **130 m³/min**
MAXIMUM ANNUAL OPERATING HOURS: **8760 hrs/yr**
MAXIMUM PRIMARY BURNER INPUT FIRING RATE: **0 GJ/hr**
MAXIMUM AFTERBURNER INPUT FIRING RATE: **6.33 GJ/hr**

MAXIMUM EMISSION QUALITY:

1. 102 mg/m³ Total Hydrocarbons
2. 50 mg/m³ Particulate Matter
3. 10% Opacity
4. Odour: None past the plant boundary such that the District Director determines that pollution has occurred.

WORKS AND PROCEDURES:


Megtec Systems Dual Dry TNV-135 Recuperative dryer with integrated thermal incinerator and related appurtenances together with good operating practices.

The incinerator temperatures shall be taken at a location which has received prior approval by the District Director and shall be continuously monitored in a conveniently visible location. The Permittee shall calibrate this temperature measurement system at the discretion of, and in a manner acceptable to, the District Director.

The Permittee shall maintain a log of inspections and maintenance conducted on the incinerators described in this Permit. This log shall be kept available for inspection for a minimum period of two years.

MINIMUM INCINERATOR EXIT TEMPERATURE: **760 °C**

Date Issued: February 04, 1994
Date Amended: **DEC 14 2009**
(most recent)


R.H. Robb, District Director
Permit GVA0550

GREATER VANCOUVER REGIONAL DISTRICT AIR QUALITY MANAGEMENT PERMIT

EMISSION SOURCE 08: #2 Man Roland Lithoman-3-IN heatset web offset press with a Megtec Dual Dry III dryer discharging through a Stack.

MAXIMUM EMISSION FLOW RATE: **230** m³/min
MAXIMUM ANNUAL OPERATING HOURS: **8760** hrs/yr
MAXIMUM PRIMARY BURNER INPUT FIRING RATE: **11.07** GJ/hr
MAXIMUM AFTERBURNER INPUT FIRING RATE: **2.73** GJ/hr

MAXIMUM EMISSION QUALITY:

1. 102 mg/m³ Total Hydrocarbons
2. 50 mg/m³ Particulate Matter
3. 10% Opacity
4. Odour: None past the plant boundary such that the District Director determines that pollution has occurred.

WORKS AND PROCEDURES:

Megtec Industries Quantum 6000 (HXC6000) catalytic incinerator and related appurtenances together with good operating practices.

The results of all catalyst tests, performed to determine catalyst activity, shall be submitted to the District Director as they become available.

The incinerator temperatures shall be taken at a location which has received prior approval by the District Director and shall be continuously monitored in a conveniently visible location. The Permittee shall calibrate this temperature measurement system at the discretion of, and in a manner acceptable to, the District Director.

The Permittee shall maintain a log of inspections and maintenance conducted on the incinerators described in this Permit. This log shall be kept available for inspection for a minimum period of two years.

MINIMUM INCINERATOR EXIT TEMPERATURE: 340 °C

EMISSION SOURCE 09: #2 Man Roland Lithoman-3-IN heatset web offset press with a Megtec Dual Dry III dryer emergency bypass discharging through a Stack(s).


MAXIMUM EMISSION FLOW RATE: **None except in the event of an emergency shutdown.**
MAXIMUM ANNUAL OPERATING HOURS: **0** hrs/yr (See Works & Procedures)

MAXIMUM EMISSION QUALITY:

WORKS AND PROCEDURES:

One bypass stack. Good operating practices. No contaminants shall be emitted from this source into the atmosphere except in the event of an emergency shutdown of the Megtec Industries Quantum 6000 (HXC6000) catalytic incinerator authorized for Emission Number 08.

Date Issued: February 04, 1994
Date Amended:
(most recent) **DEC 14 2009**


R.H. Robb, District Director
Permit GVA0550

SECTION 2 – GENERAL REQUIREMENTS AND CONDITIONS

A. AMENDMENTS

The terms and conditions of this permit may be amended, as authorized by applicable legislation. New and modified sources must receive authorization prior to start-up.

B. POLLUTION


Notwithstanding any conditions in this permit, no person shall discharge or allow or cause the discharge of any air contaminant so as to cause pollution as defined in the Greater Vancouver Regional District Air Quality Management Bylaw No. 1082, 2008 and the Environmental Management Act.

C. STANDARD CONDITIONS AND DEFINITIONS

Unless otherwise specified, the following applies to this permit:

1. Gaseous volumes are corrected to standard conditions of 20° Celsius & 101.325 kPa with zero percent moisture.
2. Contaminant concentrations from the combustion of specific fuel types are corrected to the following Oxygen content, unless specified otherwise:
 - 3% O₂ for natural gas and fuel oil;
 - 8% O₂ for wood fuel.
 - 15% O₂ for turbines
3. Where compliance testing is required, each contaminant concentration limit in this permit will be assessed for compliance based on a valid test using test methods approved by the District Director.
4. Visual opacity measurements are made at the point of maximum density, nearest the discharge point and exclude the effect of condensed, uncombined water droplets. Visual opacity compliance determinations are based on a 6 minute average in accordance with the provincial "Source Testing Code for the Visual Measurement of The Opacity of Emissions from Stationary Sources".
5. If authorized in section 1 of this permit, standby fuel use is restricted to a maximum of 350 hrs/yr and to those periods during which the primary authorized fuel is not available. Fuel oil sulphur content shall not exceed 15 mg/kg and emissions during fuel oil firing shall not exceed 10% Opacity.
6. Definitions in the Environmental Management Act and Air Quality Management Bylaw apply to terminology used in this permit.
7. Threshold Limit Values (TLV) refer to the Time Weighted Average (TWA) exposure limits for substances specified in the American Conference of Governmental Industrial Hygienists Threshold Limit Values handbook, current on the latest date that this permit issuance or amendment came into effect.
8. Sulphur Oxides (SO_x) are expressed as Sulphur Dioxide.
9. Nitrogen Oxides (NO_x) are expressed as Nitrogen Dioxide.
10. The Canadian Council of Ministers of the Environment (CCME) "Environmental Guidelines for Controlling Emissions of Volatile Organic Compounds from Aboveground Storage Tanks (June 1995, CCME-EPC-87E)" shall be adhered to for all applicable tanks unless otherwise stated in this permit.

Date Issued: February 04, 1994
Date Amended: **DEC 14 2009**
(most recent)


R.H. Robb, District Director
Permit GVA0550

GREATER VANCOUVER REGIONAL DISTRICT AIR QUALITY MANAGEMENT PERMIT

11. Authorized 'Maximum Annual Operating Hours' of 8760 hrs/yr for an emission source is equivalent to authorization for continuous operation of the emission source for an entire calendar year, including leap years.

D. HEATING, VENTILATION, AIR CONDITIONING AND INTERNAL COMBUSTION ENGINES

Air contaminants discharged from any natural gas-fired heating, ventilation or air conditioning systems for buildings and any internal combustion engines located at the discharge site shall be maintained and operated in a manner prescribed by the manufacturer to ensure good combustion of the fuel with minimum discharge of air contaminants.

E. AUTHORIZED WORKS AND PROCEDURES

Works and procedures, which this permit authorizes to control the discharge of air contaminants, shall be employed during all operating periods of the related facilities. The permit holder shall regularly inspect and maintain all such works in good repair.

The discharge criteria described in this permit are applicable on the issued or amended date of this permit unless specified otherwise. If a date different to the issued or amended date is specified, the existing control works and procedures must be maintained in good operating condition and operated in a manner to minimize emissions.

F. BYPASSES

The discharge of contaminants which have bypassed authorized control works during non-emergency conditions are prohibited unless approval has been obtained in writing from the District Director.

G. EMERGENCY PROCEDURES


In the event of an emergency that prevents compliance with a requirement(s) of this permit, that requirement(s) shall be suspended for such time as the emergency continues or until otherwise directed by the District Director, provided that:

1. Due diligence was exercised in relation to the process, operation or event that caused the emergency and that the emergency occurred notwithstanding this exercise of due diligence; and,
2. The District Director is notified at the first available opportunity of the emergency and of contingency actions invoked or planned to mitigate adverse impacts and restore compliance. Notification shall be made to Metro Vancouver's 24-hour number: 604-436-6777; and,
3. Due diligence is exercised in shutting down related processes and/or taking action to restore compliance in the shortest possible time frame, unless specified otherwise in this permit or by written notice from the District Director.

Notwithstanding 1, 2 and 3 above, the District Director may specify contingency actions to be implemented to protect human health and the environment while authorized works and/or standard operating procedures are being restored.

If an emergency situation results in a "spill" as defined in the Environmental Management Act Spill Reporting Regulation, the spill shall also be reported immediately to the Provincial Emergency Program by telephoning 1-800-663-3456.

Date Issued: February 04, 1994
Date Amended: DEC 14 2009
(most recent)


R.H. Robb, District Director
Permit GVA0550

GREATER VANCOUVER REGIONAL DISTRICT AIR QUALITY MANAGEMENT PERMIT

SECTION 3 – REPORTING REQUIREMENTS

A. MONITORING REQUIREMENTS AND REPORTING

Unless otherwise approved by the District Director prior to any sampling or analysis, all measurements shall be performed by an independent agency in accordance with Metro Vancouver Air Emissions Sampling Program Manual of Methods and Standard Operating Procedures and the BC Ministry of Environment Field Sampling Manual, as they may be amended from time to time. Any variance from these procedures must receive prior approval from the District Director.

A minimum of 3 days advance notice must be given prior to taking measurements required by this Monitoring and Sampling Program. Notification must be given to the Metro Vancouver, Regulation & Enforcement Division (phone 604-436-6777, Fax 604-436-6707, email regulationenforcement@metrovancover.org).


Unless otherwise specified, sampling shall be performed under operating conditions representative of the previous 90 calendar days of operation. All field data and calculations must be submitted with monitoring results and they shall be reported in the metric units which are used in this permit. These submissions shall include process data relevant to the operation of the source of the emissions and the performance of the emission control works.

The permit holder shall conduct the following monitoring and sampling and submit written and/or electronic reports of the results to the District Director by the dates specified below.

| SOURCE | DUE DATE | FREQUENCY | REQUIREMENT | PARAMETER(S) | TEST METHOD | REPORT TYPE |
|------------|---------------|---------------|---|--------------------|----------------|-------------|
| 01, 07, 08 | June 30, 2010 | Every 2 Years | Written report detailing the measured discharge rate and concentration of total hydrocarbons, expressed as methane, in the emissions. | Total Hydrocarbons | EPA Method 25A | Stack |

Date Issued: February 04, 1994

Date Amended: **DEC 14 2009**
(most recent)


 R.H. Robb, District Director
 Permit GVA0550

GREATER VANCOUVER REGIONAL DISTRICT AIR QUALITY MANAGEMENT PERMIT

B. INFORMATION REPORTING REQUIREMENTS

The Permit holder shall submit written reports containing the required information to the District Director by the dates specified below.

| EMISSION SOURCE | DUE DATE | FREQUENCY | REQUIREMENT | REPORT TYPE |
|-----------------|----------------|-----------|--|------------------------|
| Facility | March 31, 2009 | Yearly | Written report providing details of the types and amounts of principle products produced and principal raw materials used in the preceding calendar year. | Materials and Products |
| Facility | March 31, 2009 | Yearly | Written report providing details of the types, amounts and end use of organic solvents and organic solvent-containing materials used in the preceding calendar year. | Solvent Use |
| Facility | March 31, 2009 | Yearly | Written report providing details of the types and amounts of fuel burned in the preceding calendar year. | Fuel Use |

C. AMENDED OR ADDITIONAL REQUIREMENTS

Based on the results of the monitoring program, including the stack sampling results or any other information, the District Director may:

1. Amend the monitoring and reporting requirement of any of the information required by this Permit including plans, programs and studies.
2. Require additional investigations, tests, surveys or studies.

Date Issued: February 04, 1994
Date Amended: **DEC 14 2009**
(most recent)

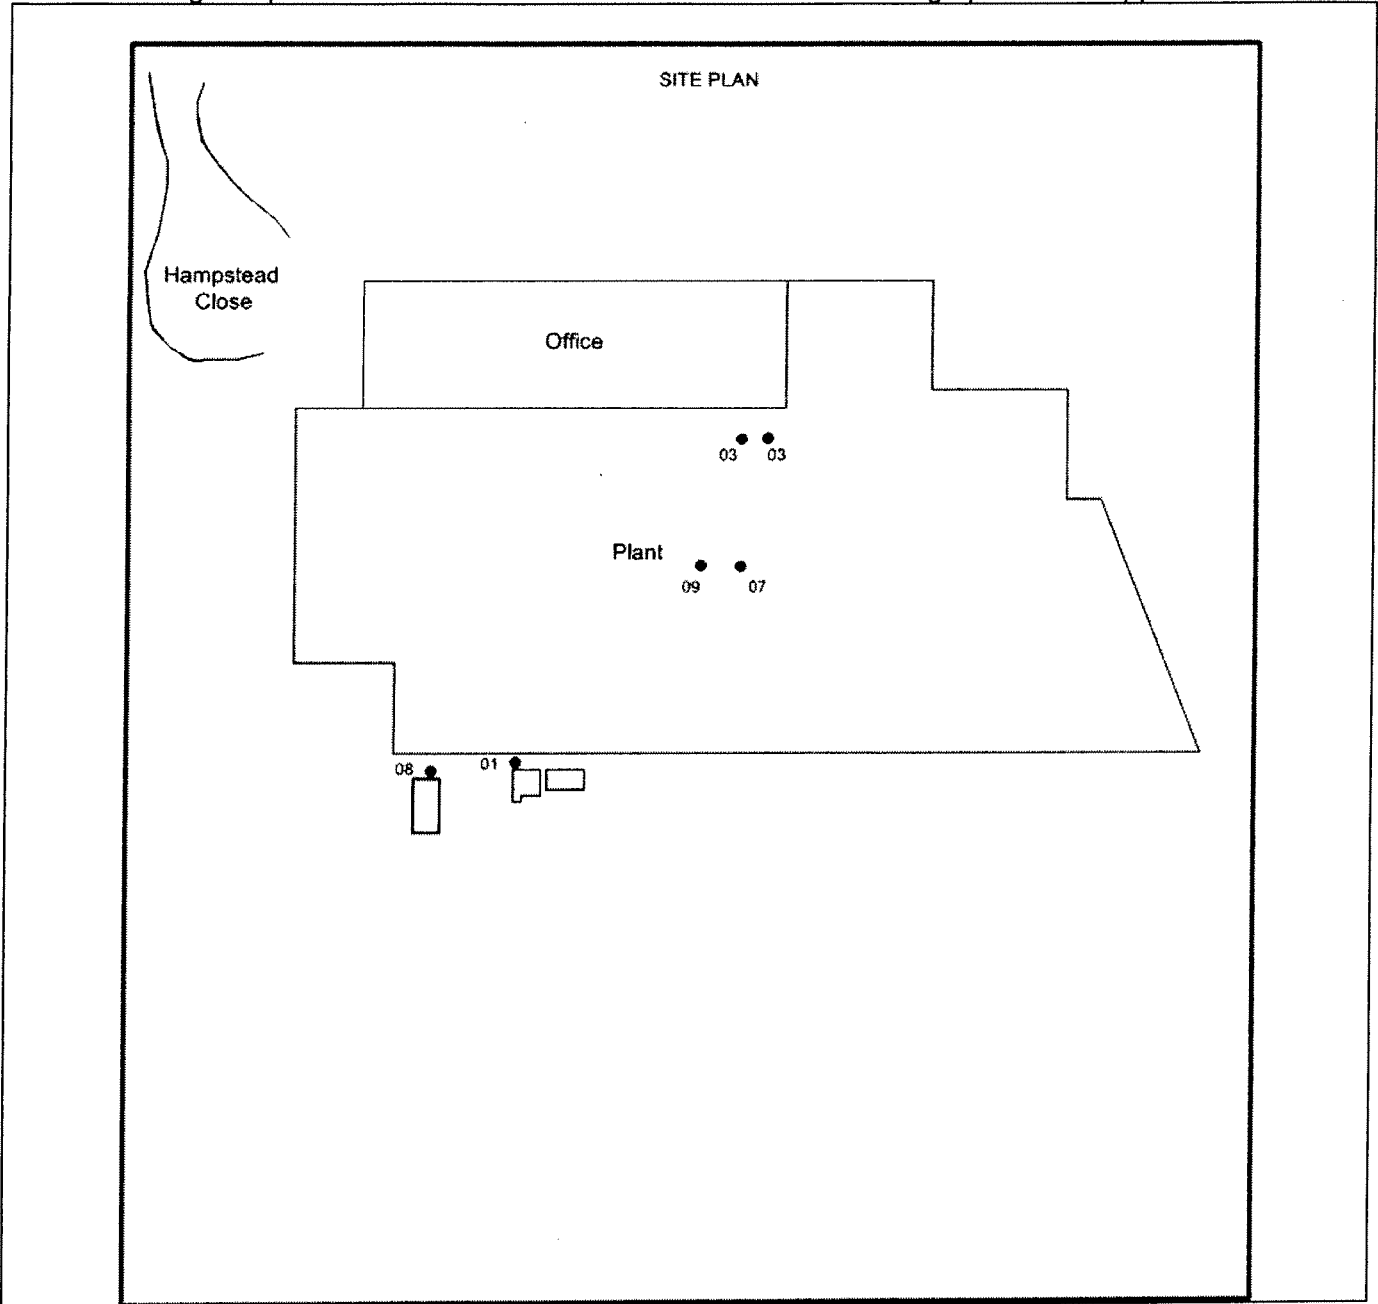


R.H. Robb, District Director
Permit GVA0550


SECTION 4 – SITE PLAN

LEGAL DESCRIPTION OF DISCHARGE SITE: Municipality of Delta, Parcel Identifier: 015-811-972, Lot 320 District Lot 351 Group 1 New Westminster District Plan 84718

The following site plan is not to scale and the locations of the discharge points are approximate.



Date Issued: February 04, 1994
Date Amended: DEC 14 2009
(most recent)


R.H. Robb, District Director
Permit GVA0550

