



AIR PERMIT GVA 1054, Report ID: J

PROGRESSIVE ODOUR MANAGEMENT PLAN

FOR HARVEST POWER RICHMOND

Prepared by:
Dieter Geesing, Ph.D., P.Ag.,
with the assistance of Geoff Hill, Ph.D.,
Aloke Vaid, Ph.D. and Jan Allen, P.E.

Richmond, BC, July 31, 2013

Contents

Progressive Odour Management Plan (POMP).....	3
1. INTRODUCTION	3
1.1. The Harvest Power Facility in Richmond.....	3
1.2. Purpose of Progressive Odour Management Plan	3
1.3. Background: Composting and History of Odour Control.....	4
1.4. Relationship of POMP and other pertinent regulations.....	4
1.5. Relationship of POMP and operations procedures.....	5
2. Prevention	5
2.1. Preventive compost operations	6
2.2. Energy Garden.....	8
2.4. Housekeeping.....	9
3. MEASUREMENT	9
3.1. Collecting data.....	9
3.2. Measuring odours	10
3.3. Odour measurement and monitoring protocol	11
3.4. Complaint handling	12
3.5. Record-keeping.....	12
4. PROGRESSIVE MITIGATION	12
4.1. Review and evaluation protocol.....	12
4.2. Use of science and training	13
4.3. Plan of Action: Facility and operations adjustment protocol.....	13
4.4. Process mitigation measures.....	14
4.5. Implementation of the protocol.....	17
4.6. Re-evaluation.....	17
4.7. Record keeping.....	17
5. Source 08A (Auxiliary Screener): Special Procedures.....	18
5.1. Background: Review of Existing Data	18
5.2. Progressive Mitigation.....	21
6. Literature & Relevant Literature	22
Appendix A: Odour Measurement	24
Intensity	24
Appendix B: Biofilter Technology.....	25

Progressive Odour Management Plan (POMP)

1. INTRODUCTION

1.1. The Harvest Power Facility in Richmond

Harvest¹ owns and operates a 24-acre Composting and Energy Garden (Anaerobic Digester and Combined Heat and Power) Facility (the “**Facility**”) on leased land owned by Port Metro Vancouver. The Facility is located in an urban area with 1.7 million people living within a 15 km radius in the surrounding six municipalities (Richmond, Vancouver, Surrey, Burnaby, Delta, and New Westminster). The Facility currently accepts yard waste, leaf waste, grass clippings, garden residue, tree trimmings, chipped shrubbery, agricultural waste, commercial food waste, residential food waste, wood waste, and other similar organic materials. As such, the Facility plays an important role in the zero waste goals set by Metro Vancouver.

1.2. Purpose of Progressive Odour Management Plan

Harvest’s corporate goal and aspiration is to operate Harvest and all its facilities as a good citizen and neighbour within its host communities. While odours are a natural by-product of the composting and anaerobic digestion processes, a properly designed and managed Facility need not emit objectionable odours that will disrupt the outside community. The purpose of this Progressive Odour Management Plan (“**POMP**”) is to provide actionable guidance.

The methods and technology in this POMP are progressive in the sense they are designed to be continuously updated and improved. As problems or opportunities arise (to reduce odours), this method and technology can be changed. In this sense it is a living document. It follows the principles of ISO 14001 of “plan-do-check-adjust”. Consequently this plan provides a process for evaluation, monitoring and correction, and a format for identifying parts of the Facility that may need adjustment to prevent and/or reduce odours. It shall also provide guidance to on-site operation personnel.

Recommendations contained herein are, in all cases, recommendations *that the ideas be considered*. They are not recommendations that the specific ideas be implemented. As stated in the Metro Vancouver Air Permit GVA1054 (May 11, 2013) (the “**Air Permit**”) pertaining to the Facility, Harvest “is not required to implement the remedial actions or other improvements and procedures contained within the report.”

The POMP is a tool to reduce potential emissions without impairing composting operations to Harvest Facility operators on how to manage and mitigate the potential emission of objectionable odours outside the boundary of its Facility. By operating the Harvest Facility with this goal in mind, we create a more sustainable future for this particular Facility as well as reinforce our corporate reputation as responsible, best-in-class operators.

¹ The Facility is owned by Fraser Richmond Soil & Fibre, Ltd., which does business in British Columbia as “Harvest.”

1.3. Background: Composting and History of Odour Control

There is a common belief that odour signals a problem in the composting process. The ground for this belief was that composting, which is a natural aerobic biological process, would not generate odours when properly practiced. Odour generation is, however, an inevitable result of the decomposition of organic matter – without which we would not be able to produce compost. As one of the worldwide most recognized experts on composting has observed, “Odorous compounds inherently form as raw organic materials decompose” (Haug; 2004).

Historically organic waste facilities have been largely reactive to odour emissions following a pattern of:

- Operate according to permit conditions with no formal odour prevention or control strategy.
- React “if-and-when” odour complaints or regulatory enforcement requires a response.
- Investigate the event(s) and propose a fix to respond to the problem or complaint or citation.
- Adjust practices accordingly.

The historical approach is pragmatic, practical, and common in the industry but may be insufficient to prevent recurring problems. Especially for Harvest which operates within a populous urban environment, the historical approach is inadequate to meet Harvest’s aspiration to operate as a “good neighbor and citizen.”

This **new protocol is pro-active** rather than reactive, and can be viewed as a self-regulating system. This new pattern of odour management is best described as:

- Operate so as to **minimize** the potential escape of offensive odours beyond the property line, according to permit conditions and a self-diagnostic and self-regulatory odour prevention and control strategy.
- Monitor and measure odour, odour causing compounds and conditions, and odour covariates (i.e. oxygen concentration) under a number of operating conditions, both scheduled and unscheduled, using quantitative methods.
- Evaluate measurements and respond by adjusting the Facility or the operating plan to prevent and minimize odours.
- Re-measure, re-evaluate, and adjust operations as necessary.

1.4. Relationship of POMP and other pertinent regulations

This POMP is also developed to meet certain regulatory requirements. The Air Permit directs Harvest to develop a Progressive Odour Management Plan to be submitted for review and comment by the District Director. This plan requires details about activities surrounding prevention, accountability and progressive mitigation of odours that may arise from activities at the site.

- **Prevention** entails proper operation of the facility. It can include the development of standard operating procedures to prevent release of odourants to the environment (*i.e.*, preventative maintenance, leak detection and repair, feedstock handling, review of feedstocks *etc.*)
- **Accountability** outlines the expected interactions among operators, regulators, and neighbors. It provides procedures for identification, notification and resolution of malodours. It can include the development of responsibility charts, contact info, response procedures to upset conditions, response to odour complaints, communication plans *etc.*
- **Progressive mitigation** is a series of escalating operational adjustments. It can include several levels of response which can include: self-detection, correction and reporting, implementation of new or changing of existing operational procedures, restriction of feedstocks and ultimately retrofitting of technologies or controls works if so required.

This POMP also meets the requirements of B.C. Reg. 18/2002; Organic Matter Recycling Regulation including amendments up to B.C. Reg. 198/2007 (“**OMMR**”): Division 2; Construction and Operation of Composting Facilities. OMMR has a requirement for plans and specifications that include an odour management plan which stipulates how air contaminants from the composting Facility will be discharged in a manner that does not cause pollution.

1.5. Relationship of POMP and operations procedures

This POMP is not intended either to explain the standard operating procedures (“**SOPs**”) for the Facility or to replace the SOPs. Instead, it is meant to explain how those procedures in place at the time of writing have been designed to prevent and mitigate objectionable odours, and to suggest additional steps that might be considered if that does occur. SOPs evolve constantly as Harvest seeks continuous improvements. Any identified conflicts between the operating procedures and the POMP should be examined with consideration of which (or both) should be updated.

2. Prevention

In order to minimize the development of conditions that could lead to odour problems, the material handling areas of the site and operating procedures have been designed based on the nature and quantity of materials to be received and stored, climatological factors, adjacent land use, topography, season, and drainage controls. For example, an unturned, covered aerated static pile system (“**CASP**”) discharging air from the compost cells through biofilters has been implemented in order to avoid the release of odours typical of windrow-turning forms of aeration; the primary screening plant has been enclosed and a biofilter installed; and a state-of-the-art anaerobic digestion Facility (Energy Garden) has been constructed to allow the processing of large quantities of more odorous food wastes within enclosed, air-tight and gas-tight conditions.

2.1. Preventive compost operations

Accountability: General Manager, Geoff Hill.

In-bound material is tipped at one of three locations, according to material type. Material types include pre- and post-consumer food waste, green waste, clean wood waste, and other materials listed under the Facility's Solid Waste Licence (Greater Vancouver Sewerage and Drainage District Licence C-004, issued 1997, last amended January 19, 2010.)

1. Green waste is normally tipped at the receiving area north of the CASP system. There is a second receiving area south of the CASP system for use during peak periods in spring and fall. Following tipping, loads are inspected for contaminants, including but not limited to plastic, glass, metal, and treated wood. Loads are accepted and rejected in accordance with the Facility's determined feedstock specification. Very large contaminants are removed by excavator. Straight food waste loads, or loads with predominantly putrescible waste such as grass clippings, will be directed directly from the site entrance (scale house) to the receiving hall at the anaerobic digester (Energy Garden) (preventive measures for the processing of food waste in the Energy Garden are detailed further in this document).
2. Within not more than seven days, but typically within less than 48 hours of tipping, different material types are mixed depending upon type of feedstock, bulk density and moisture content being the primary considerations. Generally composting recommendations suggest that bulk density should be less than 1000 lbs/cu. yd. (0.67 tonnes / cbm) (Oshins, 2006). Historically, size reduction (grinding) was typically not used prior to mixing. Beginning in the summer of 2013, a grinding step has been added to produce smaller, more uniform size materials to facilitate more even and faster material degradation. On a practical level, the moisture threshold for avoiding anaerobic conditions is approximately 70% (wet basis). However, this number represents a compromise and a practical target. The optimal moisture content depends on the feedstocks (e.g. particle size, degradability) and the stage of composting (Richard et al., 2002) with an optimal moisture between 40-60%.
3. Mixed and prepared feedstock is placed as soon as possible atop the aeration piping using a loader or excavator. The materials atop 2 – 4 pipes are grouped into batches (cells). Typically it takes more than one day to create one batch, and varies depending on the season. The Facility has been designed so as to accommodate peak flows based on seasonal variation. Pile height may vary between a minimum of approximately 3 meters to a maximum of 6 meters (or 8 meters between April 15-July 15 and October 15-December 15). In general, Facility operators keep pile heights as low as practical, taking into account volume throughput requirements. The use of equipment on top of the piles is kept to the absolute minimum and usually restricted to within 1-2 days prior to cell deconstruction. Any machinery driven on top of the pile surface loosens all compost material it has moved over upon completion of its work on the pile. These steps minimize the risk of material compaction, which can lead to the creation of anaerobic pockets and odour.

4. A vacuum is induced below the pile by stainless steel blowers which pull air through a network of perforated pipes from the pile to maintain aerobic conditions. The system eliminates labor-intensive turning; reduces emissions sometimes associated with turning of compost; allows for proper control and homogeneous distribution of temperature and moisture maintenance through airflow adjustment, and enables excellent odour control.
5. The forced negative aeration system removes large amounts of moisture in form of vapor from the composting material. The rate of daily rainfall, even in winter, is minor in comparison with the amount of daily moisture transferred from composting material to vapor and transported through the air to the biofilters. Some liquid condenses in the aeration system and is periodically collected and transported to the Energy Garden. Eventually a permanent piping system will deliver it constantly to the Energy Garden. Should the compost operation start receiving drier material such as wood waste, a means of feedstock moisture conditioning would be explored. Currently the feedstock is primarily yard waste and source separated organics and the moisture content is optimal.
6. In a previous operational mode (prior to March 2013), hot compost air was pulled through the piles, potentially containing odourous compounds, and was diluted and cooled with fresh air by means of a fresh air vent at the far end of the common manifold. The intent of this action was to keep the biofilter at <math><40^{\circ}\text{C}</math>. Opening the vent compromised negative pressure at each of the 24 perforated sparger pipes resulting in drastically diminished oxygen delivery to compost. Without adequate oxygen supply, anaerobic conditions developed and elevated odour resulted from non-point source locations through the CASP. Currently (March 2013- present), the fresh air intake on the end of the common manifold is kept closed. All of the air pulled through the common manifold comes through the compost pile and into the shared manifold. This exhaust air is between 40-60°C and causes the biofilter media to operate at similar temperatures. We have concluded, through monitoring of inlet and outlet gases and qualitative odour evaluation, that operating in an aerobic state in the compost pile and a thermophilic state in the biofilter is sufficient to treat odours to the spirit of the Air Permit. There is research in the literature body that supports the biochemistry of thermophilic biofilters. Many positive aeration CASPs rely on a compost cover which is at a similar temperature to the compost pile, to treat odour. According to Engineered Compost Systems, a positive aeration system with a cap of compost would be as effective as biofilters in our situation. We expect that running the biofilter at higher temperatures will reduce its useful life by means of composting away the mass, creating more fine materials, and that this will be evident by increasing pressure on the biofilter inlet. Inlet pressures and outlet gasses are being monitored weekly and monthly in order to be aware of when the biofilter media needs to be replaced.
7. The expected life of the biofilters is one-two years. They were rebuilt in the winter of 2012/2013. We have been supplied with quotations for fans which can blow cool fresh air into the biofilter inlet (after the fans) which will not reduce the aeration supplied to the compost pile, but which will reduce the empty bed residence time (EBRT) of the biofilter. Despite the cooling effect of fresh air additions, the reduction in EBRT is counter-productive to odour treatment. Nevertheless, this cooling system will be evaluated, most likely through an experimental trial using our Draeger gas monitoring equipment and Scentroid analysis.

8. An automated temperature monitoring and recording system continuously logs sparger air and compost temperature. It facilitates easy investigation of cell status and also documents compliance with the OMRR schedule 1 pathogen reduction process requirements. We also conduct considerable daily temperature and weekly oxygen measurements.
9. Residence time in the CASP is approximately four weeks. BC OMRR pathogen reduction processes temperatures are generally reached within 5 days (3 days > 55°C) and vector attraction reduction processes are reached in the next 14 days (14 days > 40°C with average of 45°C). The remaining 10 days (day 21-30) are for improved stabilization and maturity. In some cases where sections of the cell require more time composting, an excavator will move onto the cell and move material from one section of the cell to another in a bulk mixing fashion. Engineered Compost Systems indicated that improving our ability to mix feedstock, by means of a large feedstock mixer, would bring the greatest improvements in compost quality and reduction in odour. We are researching bulk mixing systems, such as those supplied by Lucknow Products, to address converting our mixture from heterogeneous to homogeneous.
10. Following the CASP, the product is further cured (for an improvement in stability and maturity) in large windrow-like piles in order to improve quality and maturity. It is then screened to remove contaminants and “overs” (organic material with a particle size too large to be sold as a product). Material can be screened at any point using Screening Plant #1, which has a biofilter. Material screened with Screening Plant #2 must be 40 days old or have been tested and met conditions stipulated in the Air Permit under Source 08A to ensure it is not anaerobic at the time of screening.
11. Overs and middlings (both by-products having particle size >3/8”) are recycled back through the process and ground / composted until broken down to an appropriate particle size. Contaminants are disposed.
12. Compost is sold under the OMMR classification of “Class A not solely produced from yard waste.” The product is sold wholesale in bulk and periodically bagged for retail markets and is used in a variety of applications including agriculture, landscaping and horticulture, and erosion control.

2.2. Energy Garden

Accountability: Energy Garden General Manager Aloke Vaid.

Most food waste loads will be directed to the Energy Garden. Key odour management considerations are:

1. The Energy Garden receiving area is kept under negative air pressure, discharging air to a biofilter, to prevent the escape of fugitive odours. Therefore, the doors to the receiving area should generally be kept closed, except for allowing delivery trucks to tip their loads, for

removal of digestate, movement of equipment, or maintenance activities on the doors themselves.

2. The digestion process itself occurs under air-tight and gas-tight conditions and therefore should not result in the release of fugitive odours.
3. Feedstock is a mix of food and ground yardwaste.
4. After approximately two weeks of residence time in the percolation tunnels, the digestate (spent feedstock) is loaded into a rock truck driven into the receiving hall. From the receiving hall, the material is taken immediately to the composting cells, mixed with structure material for porosity and placed in locations inside the cells that have been prepared to accommodate the material.

In light of this design, excessive odours would most likely be caused by (a) leaving the doors opened for an excessive period of time; (b) a malfunction of the plant ventilation system (c) degradation in the effectiveness of the biofilter; or (d) other deficiency in digester operations such as release through overpressure valves. The occurrence of such odours should be promptly investigated. The permanent presence of trained operators allow for prompt action.

2.3. Preventive Maintenance

Engines and equipment are subject to a comprehensive maintenance program that avoids break-downs and allow for material flow without bottlenecks or interruptions

2.4. Housekeeping

Harvest Power employees are trained and directed to maintain a clean site. Puddles are drained; waste is regularly removed from the site and organic material spilled by trucks incorporated into the cells or energy garden feedstock.

3. MEASUREMENT

3.1. Collecting data

Facility design and sound operating practices are only the first step to effective odour management. A pro-active approach requires regular monitoring and measurement of odours, followed by analysis, so that Facility operators can track the interaction of feedstock volume and composition variations, meteorological conditions, and operating practices in producing or mitigating odours. This section addresses measurement of odours, along with collection of other necessary data. The following section will address analysis.

This approach allows for correction of potentially odour-generating practices and testing of proactive measures to avoid odour generation.

3.2. Measuring odours

As of the date of this document, Harvest proposes to pursue odour measurement using the methods described below. Since certain aspects of the measurement protocol are subject to review and approval by Metro Vancouver, actual implementation may vary. The POMP should be updated as appropriate at the next scheduled revision.

For purposes of this POMP, it is useful to have a high level understanding of technical aspects of odour measurement. Odours are perceptions of numerous chemical compounds

1. The **detectability, or odour threshold**, is the theoretical minimum concentration of odourant stimuli necessary for perception in some percentage, normally 50 percent, of the population. Two types of thresholds can be evaluated, namely the detection threshold and the recognition threshold. In measuring environmental odours, which are complex mixtures and not pure compounds, the threshold cannot be expressed as a concentration level (i.e., parts per million or micrograms per cubic meter). Instead, threshold is expressed as a dilution-to-threshold ratio (D/T). A D/T ratio of 1,000, for example, means that one volume of odourous air requires 1,000 volumes of odour-free air to dilute it to threshold.
2. **Odour intensity** refers to the perceived strength of the odour sensation. Odour intensity is related to odour concentration (D/T) and increases as a function of concentration, called a “dose response” function.
3. **Odour character** is simply what the odour smells like.
4. **Hedonic tone** is a category judgment of the relative pleasantness or unpleasantness of an odour. When related to the potential for odour complaints, the more objectionable or offensive an odour is, the more likely to elicit complaints. Ranking of Hedonic Tone value is "subjective" to the observer, using his/her personal experience and memories of odours as a reference scale.

Several methods of measurement are available.

1. By a **Field Scoring** by a trained observer method using a numerical algorithm (scale of 1 to 10 for each of intensity, duration, and hedonic tone with values of 0 to 21). This is quick and inexpensive, though inherently subjective. Due to this subjectivity, Harvest does not intend to rely on Field Scoring.
2. By real-time **Field Sampling** of ambient air using a field olfactometer (such as a Nasal Ranger or Scentroid SM100 with Odour Unit values of 2 – 30,0000). This requires instrumentation, but provides greater control and precision. It can be deployed relatively quickly.

3. By drawing **Air Samples for Laboratory Analysis** using dynamic olfactometry. A simple and inexpensive version of laboratory analysis could be implemented with use of the Scentroid SM100, in which air samples could be captured by a trained technician in tedlar bags, and those samples analyzed in Harvest's on-site laboratory using the Scentroid. This can be deployed quickly in response to specific situations and at relatively low expense. An alternative is for the air samples to be sent to a third party laboratory for analysis using a human panel of trained observers. Since no such laboratory is available in British Columbia, this approach requires advanced planning and coordination of sampling dates, overnight air shipment, and assembly of the human panel. The required advance planning and expense associated with this approach limit its utility.

See *Appendix A: Odour Measurement* for further discussion.

3.3. Odour measurement and monitoring protocol

Accountability: Compost General Manager Geoff Hill (for both compost and Energy Garden)

For this protocol, both Field and Laboratory analysis will be used. Each time odours are measured the meteorological conditions will also be recorded (wind direction, wind speed, temperature, precipitation, cloud cover, humidity, and barometric pressure).

Subject to further discussion with the regulator, Harvest has purchased a Scentroid SM100 which it can deploy for use in taking field measurements (both on-site and off-site), and also for use in on-site laboratory analysis. Frequent and regular use of the Scentroid can provide more data, more quickly, to enable Harvest operators to more rapidly assess the interaction of feedstock, operating practices, and meteorological conditions and thereby pursue continuous improvement.

The Air Permit also requires quarterly odour testing. As of this writing, the regulator may be interpreting that to require off-site, third-party laboratory testing. It is recommended that this approach be suspended and that Harvest concentrate its efforts on the more frequent measurement-feedback-adjustment loop. Under this approach, third party laboratory testing would be reserved as a higher, or subsequent progressive step to be taken if, for example, other odour management techniques fail, complaints arise, and use of a third party would assist in providing independent data points.

Measurements will be taken using the test methods outlined in the "Sampling Plan to Conduct Odour and Emission Sampling," (July 16, 2013, prepared by Levelton, Ltd. for Harvest). Measurements will be conducted for three different conditions:

1. Scheduled by season or specific frequency, time of day, inversion, dawn, dusk, *etc.* An initial schedule of quarterly measurements is required by the Air Permit. Harvest management may choose to schedule more frequent data collection.
2. Unscheduled at random times.
3. During a complaint in progress.

The Facility will have 4 to 8 pre-determined and standard observation locations on site, plus additional locations will be added depending upon the conditions at that time. A plan for periodic and event-driven off-site field sampling should also be developed, taking into account complaint history and meteorological conditions.

3.4. Complaint handling

Accountability: Business Manager, Dmitry Malyrenko and General Manager Geoff Hill

Another important source of data and feedback for plant operations is complaint data. Harvest maintains an odour complaint hotline that records the date, time and location of complaint, along with an odour description. Complaint information is also provided from Metro Vancouver and the City of Richmond. This information is logged, along with a description of the odour, description of the activities at the site at time of complaint (complaint including biofilter operation, cell unloading, screening, debugging, mixing products, *etc.*), wind direction and speed, observations from our staff. Based on the observed factors, most especially wind direction, the complaint is classified as either possibly caused by Harvest or not.

When a complaint is received that has a high likelihood of originating at Harvest, the Scentroid odour analyst contractor / staff will likely be deployed to analyze emissions source odours, on-site ambient odours, and if necessary in extreme circumstances, off-site odours at the location of complainant. Time is of the essence, since odours are often transitory. The observer should remain at the complaint location for at least 20 minutes to assess.

3.5. Record-keeping

Odour incidences are summarized and recorded in odour logs and kept in a database. It is recommended that Harvest consider creating a centralized digital repository, for example utilizing the Sharepoint portal, so that the data can be more readily accessed for purposes of evaluation and analysis.

4. PROGRESSIVE MITIGATION

4.1. Review and evaluation protocol

Accountability: Compost General Manager Geoff Hill; Energy Garden General Manager Alope Vaid

The evaluation process will yield conclusions based on performance measurements that can then be used to make corrections, improvements, and adjustments to both the Facility and the operating procedures. The intent of the evaluation process is to find odour sources and systematically minimize them through prevention, capture, and treatment.

The analysis of data collected allows facility operators to establish correlations between various operational activities and weather conditions and to evaluate the efficiency of pro-active measures. Factors to be considered during evaluation include feedstock receiving and initial processing, climatic factors that magnify or mitigate odours, scale of fugitive odours due to material handling, specific odour sources within the Facility, operational practices and schedules that generate odours. There are also mitigating factors that affect odour emission rates. They include wind and rain protection in the Facility design, material handling rates, topographic features at the Facility limit, vegetated greenbelts, and capture and control equipment (biofilters).

Evaluations should be conducted and statistically interpreted no less than every 6 months, and more frequently as needed. For example, if there is a sudden spike in off-site objectionable odours, whether or not complaints are received, an evaluation should be undertaken promptly. Because the Air Permit has significant evaluation and reporting requirements the Air Permit conditions will drive this evaluation initially. For the initial term of the permit (to June 30, 2015), the evaluations should be conducted quarterly, upon the receipt of quarterly testing data for odours and for Volatile Organic Compounds (VOCs).

Any recommended changes should be documented in a Plan of Action.

4.2. Use of science and training

Harvest is committed to introduce new odour mitigation measures, or to revise existing mitigation measures, based on latest and rigorous science and within economic reasonable and cost-effective means.

Employees are encouraged to pursue professional development to stay acquainted with latest technology and practices.

4.3. Plan of Action: Facility and operations adjustment protocol

Accountability: Compost General Manager Geoff Hill; Energy Garden General Manager Alope Vaid

Following the above-described measurement, analysis and evaluation steps, a Plan of Action will be developed to prioritize changes to both the built Facility (capital expenses) and operations (possible operating expense). Each adjustment to the Facility will include a schedule (target date) for completion, cost estimate, and benefit statement so a cost-benefit justification can be made. A list of possible progressive Facility changes to be considered and evaluated, based on circumstances, is set forth in Section 4.4 below.

Each adjustment will include a description of roles and responsibilities as well as any required changes to the operating plan for the Facility. In some cases the regulating agency or agencies may have to be involved. For example, any new equipment brought on site that may materially affect air emissions from a regulated source must be reported.

4.4. Process mitigation measures

As described in earlier sections, this POMP is based on a data-driven, diagnostic approach. That is, when odour problems arise, the first step is to identify the source of the problem, collect data on the nature, extent, and severity of the problem, and use that data to help determine the possible cause(s).. Based on such analysis, a variety of measures may be taken to either mitigate the production of odour at the source or to reduce its migration beyond the Facility boundaries.

Given the complexity of operations at the Facility and the daily and seasonal variation of feedstock inflows and operating conditions, a detailed “cookbook” that specifies each possible situation and how it should be addressed is neither practical nor advisable. Instead, this section sets forth a variety of mitigation steps that can be considered by the Facility operators as needed in response to problems.

The presence of nuisance odours identified by operators, neighbors or site inspectors initiates an escalating or progressive set of responses.

1. **Level One. Self-odour inspection and tactical correction.** For example, an operation may be suspended under certain weather conditions; odourous feedstock may be directed to the energy garden; biofilter blower speed can be increased or reduced, work shift hours may be increased to process material more promptly. The corrective actions may be temporary and situation-specific.
2. **Level Two. Operational Changes.** If Level One has not provided a durable elimination of the nuisance odour, operational changes such as reduction of pile height, increase in bulking agent, revamping of biofilters and misting system will be considered.
3. **Level Three. Capital Plant Adjustments.** If after implementing Level Two measures objectionable odour outside Facility boundaries still persists, more detailed odour identification action will be implemented and thorough retrofitting options will be considered (changes to equipment, new equipment, new biofilter material, removal of material into energy garden or alternative locations

For each potential odour source, the following table offers possible mitigation measures to be considered by Facility operators. The measures within each group are sequenced in rough approximation from easiest to implement (less expensive and/or less disruptive to operations) to more difficult to implement (more expensive and/or greater disruption). For the reasons explained in Section 1.2, the inclusion of a possible mitigation measure on the list below does not commit Harvest to implementation of that measure. Any and all mitigation measures will be assessed in terms of their anticipated technical and cost effectiveness in addressing the diagnosed cause of a specific odour problem.

Note that certain of the measures may require consultation, notification, or advance approval from the regulator.

4.4.1. Composting operation

Waste Receiving and Tipping Area (Permit Emission Source 04).

- ❑ Inspect incoming loads for odour and reject excessively odorous loads. Redirect to energy garden or incorporate immediately into cells
- ❑ Stockpile bulking agents as temporary cover for wet material or grassy material (or redirect to energy garden)
- ❑ Reduce holding time (before incorporation into CASP or Energy Garden), especially for highly odorous materials and in warmer weather (above 27°C).
- ❑ Restrict volume of inflows.
- ❑ Install temporary or permanent enclosed receiving area.

Grinding

- ❑ Don't grind odorous material
- ❑ Mist
- ❑ Enclose

CASPs – not including biofilters (Permit Emission Sources 05 and 06)

Loading Practices

- ❑ Alter pre-mixing protocols. Possibilities include:
 - Acquire standard batch mixer (load/mix/empty)
 - Acquire batch mixer and run in semi-plug-flow mode
 - Lay out materials in windrows, then run through with straddle type windrow turner
- ❑ Expose pipe, re-chip, and red brush/over layer to replenish air floor each cell building
- ❑ Lower pile height
- ❑ Implement procedures for turning material to increase aeration

Unloading Practices

- ❑ Delay unloading if climatic conditions are unfavorable

Aeration System

- ❑ Inspect sparger pipes during pipe exposure between cell deconstruction and reconstruction
- ❑ Pump out any fluid at the pipe level
- ❑ Rebuild air floor with chips, brush, overs
- ❑ Concentrate aeration on wet or poorly decomposed lines by adjusting valves from their standard position (as per Engineered Compost Systems recommendations) which equilibrates vacuum across all sparger lines, to a temporary maximum (fully open) position.
- ❑ Modify the aeration system
 - Reconfigure piping layout (double the number of sparger pipes)
 - Add blower fan capacity
 - Replace or augment aeration pipe system
 - Reverse blowers to positive aeration and maintain a moist cover of mids or overs (recommended by Engineered Compost Systems as the most effective means of enhancing aeration system to reduce odours and maintain oxygenated compost)
- ❑ Temperature control. Attempt to maintain temperature below 75 C by manually adjusting sparger valves to concentrate airflow rather than evenly distribute airflow. Add water if

necessary and maintain maximum airflow to dissipate heat through latent heat of vaporization and discharge as exhaust.

- ❑ Augment process controls
 - Automate damper controls through temperature feedback

Curing windrow management

- ❑ Build surge pile after curing to mitigate space restrictions and/or allow longer curing for piles.
- ❑ Force aeration
- ❑ Turn material with Vermeer Side Turn (recommended by Engineered Compost Systems for improved quality and stability prior to screening)
- ❑ Plan operations based on weather forecasts

Biofilters (Permit Emission Sources 03, 05, 06, 08)

- ❑ Alter/increase misting
- ❑ Remix media and supplement with new material
- ❑ Add media. Add 6" additional layer of compost, mids, or ground overs
- ❑ Replace media
- ❑ Add second stage polishing filter
- ❑ Eliminate biofilters by reversing aeration system to blow positive pressure and build and maintain moist covers on piles each batch (recommended by Engineered Compost Systems as most effective means of enhancing aeration system and odour elimination / treatment system)

Primary Screener (Permit Emission Source 08)

- ❑ Time with weather conditions
- ❑ Check that material has been adequately cured

Auxiliary Screener (Permit Emission Source 08A)

See further discussion below at Section 5.

- ❑ Minimize use of the Auxiliary Screener, relative to reliance on the (enclosed) Primary Screener.
- ❑ Check to ensure that material to be processed through the Auxiliary Screener has been adequately cured and meets conditions of Air Permit.
- ❑ Schedule movement of material to the Auxiliary Screener during daytime and more unstable atmospheric conditions.
- ❑ Avoid moving material from curing to screening and avoid operating the Auxiliary Screener during times when meteorological conditions increase the probability of causing offsite odours such as warm and still night times, weekends and statutory holidays, atmospheric inversions, and constant wind speed and direction. See further discussion of meteorological conditions below.
- ❑ Collect data on odour measurements and reported off-site complaints, with timing and recorded operating hours of the Auxiliary Screener and meteorological conditions to determine more and less favorable operating protocols. Adjust operations (specifically, hours for movement of material from curing to the screener and actual operation of screener) accordingly and re-measure. -
- ❑ Install temporary or permanent enclosure.

Housekeeping

- ❑ Remove uncomposted material between cells and in the aisles
- ❑ Soak up / drain puddling water

Contingency

- ❑ Identify alternative facilities and/or equipment for unexpected deliveries or unexpected equipment failures

General operation management

- ❑ Increasing operating shifts to accommodate all material tipped throughout the working day hours

4.4.2. Energy garden

Odourous emissions from the Energy Garden would normally originate in the Receiving Hall, which is operated under negative air pressure and controlled through the biofilter. Excessive odours would typically indicate degradation in effectiveness of the biofilter and addressed by the mitigation measures addressed under Biofilters. Odourous emissions can also originate from the opening of overpressure valves. This does typically not occur under normal operational conditions. Reduction of the percolation rate and of the digester feeding can mitigate the emissions.

4.5. Implementation of the protocol

An Odour Management Team will be assembled for the Facility. This team will include Cor Diekman, the Energy Garden General Manager (Aloke Vaid), and Compost General Manager (Geoff Hill). This team will meet to charter the roles, responsibilities, schedule, records management.

The team will determine a schedule for regular meetings, as well as protocols for triggering event-driven meetings e.g., a sudden uptick in off-site complaints. Random-timed or event-based measurements will occur according to the protocol. A schedule of measurement dates will be maintained in the Compliance Calendar.

4.6. Re-evaluation

Each adjustment action plan should also include identification of specific measures that will be used to assess the effectiveness of the adjustment step, compare the odour situation before and after a measure has been implemented, along with timing and accountability for the re-measurement and re-evaluation.

4.7. Record keeping

Records of evaluations and Plans of Action should be kept so that they can be reviewed at least annually in connection with the update of the POMP. Again, it is recommended to use a central digital repository such as Sharepoint.

5. Source 08A (Auxiliary Screener): Special Procedures

There are two main screening plants at the Facility. One (Air Permit Source “08”) is fixed and enclosed with a partial enclosure and biofilter. The other (Air Permit Source “8A”) is portable and includes a portable misting/neutralizer system (“Auxiliary Screener”). The regulator has hypothesized that Auxiliary Screening operations could be a major source of odor emissions from the site. The little data available in this regard to date has not supported nor declined the hypothesis.

5.1. Background: Review of Existing Data

According to the preliminary investigation conducted by Odor Science and Engineering in November 2012, the Auxiliary Screener alone was responsible for very little odour emission. Overall, the odour emissions associated with screening were estimated to represent approximately 7% of the Facility’s total odour emissions. Of that 7% fraction, most of the odour related to screening (97%) was emitted from the hot steaming piles of freshly excavated compost material transported to the screener area and waiting to be screened. Based on this finding, it would make little difference to the overall odour impact of the Facility when during the day the screening equipment is operated. Instead, it would appear that the greater odour risk derives from movement of material from curing piles to the screener.

Consultants to Harvest have advised that, in their experience, odour impacts from the facilities with ground level sources (such as Fraser Richmond) tend to be **lower** during **unstable** atmospheric conditions. These conditions typically occur on sunny days, predominantly earlier in the morning when wind speeds tend to be lower. **More stable** atmospheric conditions tend to be correlated with greater odour impacts. In the case of Fraser Richmond, these theoretical associations appear to be borne out by comparing meteorological data with an analysis of the Facility complaint log from January 1, 2012 through May 31, 2013. Figure 1 shows that most complaints were associated with easterly wind direction, with southerly winds secondary.

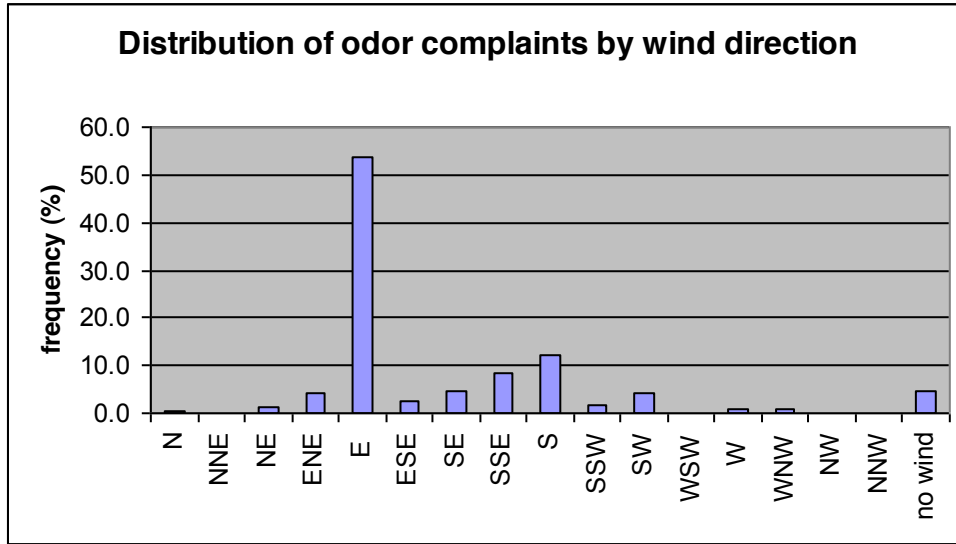


Figure 1: Distribution of odour complaints by wind direction, January 1, 2012 – May 31, 2013

Note: Only the complaints for which Fraser Richmond had been identified as a “possible” source in the complaints spreadsheet were used in the analysis.

This is consistent with the windroses for the Facility, which show a predominance of easterly and southeasterly winds for Stability Classes 4-6 (neutral to Moderately/Extremely Stable). See Figure 2.

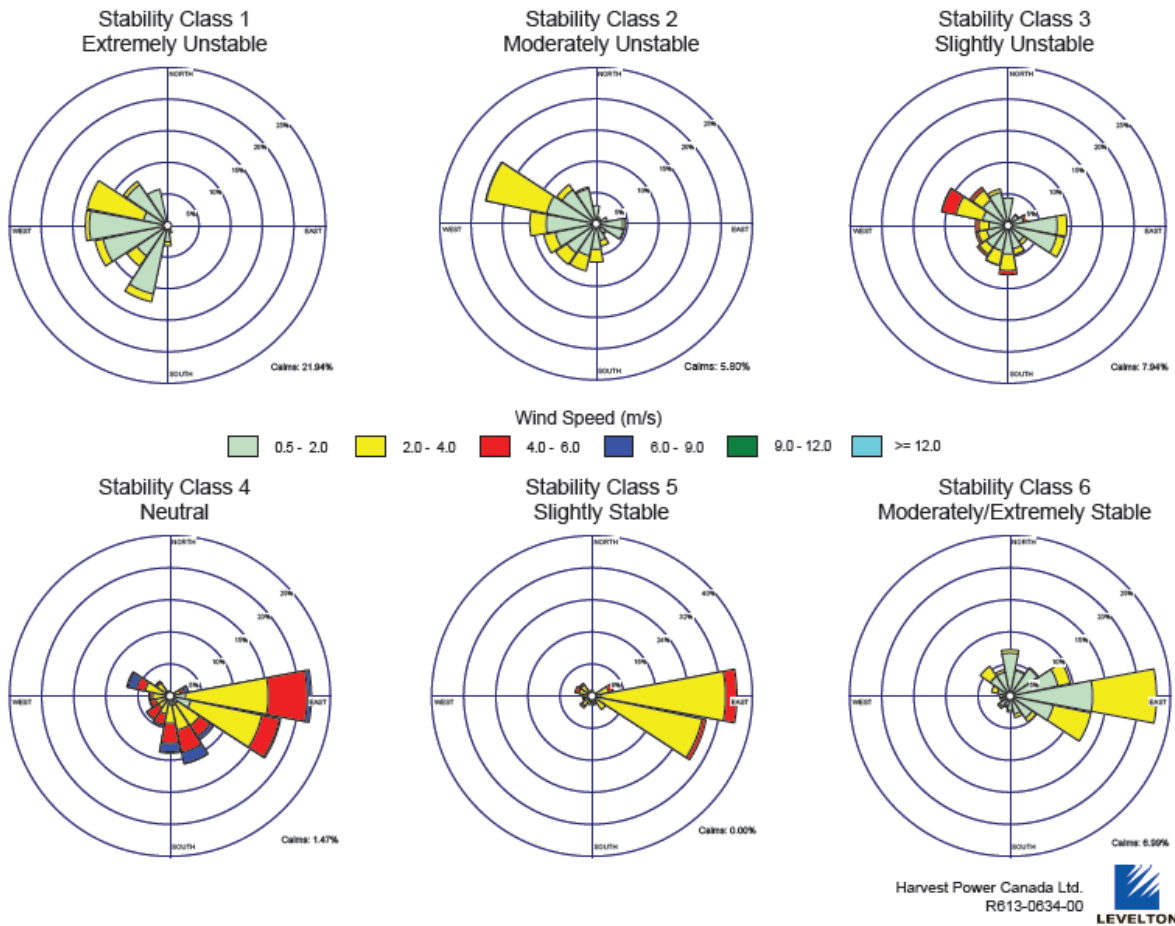


Figure 2: Wind Direction by Stability Class

In theory, this would suggest that if operating hours for the Auxiliary Screener must be extended to deal with volume demands, especially during summer, the hours should be extended in the direction of starting closer to sunrise (when atmospheric conditions are more unstable), rather than waiting until 7:00 or 8:00 am, to take further advantage of unstable conditions associated with warming post-sunrise.

However, an analysis of complaint data shows that many complaints were registered in mid-morning, peaking 10-11 a.m. See Figure 3 (next page).

The historical complaint data must be interpreted cautiously, since most of the complaints were registered in late 2012 and early 2013 when certain operational deficiencies combined with publicity about Facility odours produced a rash of complaints. (The days with the highest number of complaints tended to be within 24 hours of news reports.) Significant operational improvements have occurred since that time. Also, the available complaint data cannot be correlated with operations of the Auxiliary Screener. The historical complaint data is not, therefore, a useful guide to future operations of the Auxiliary Screener.

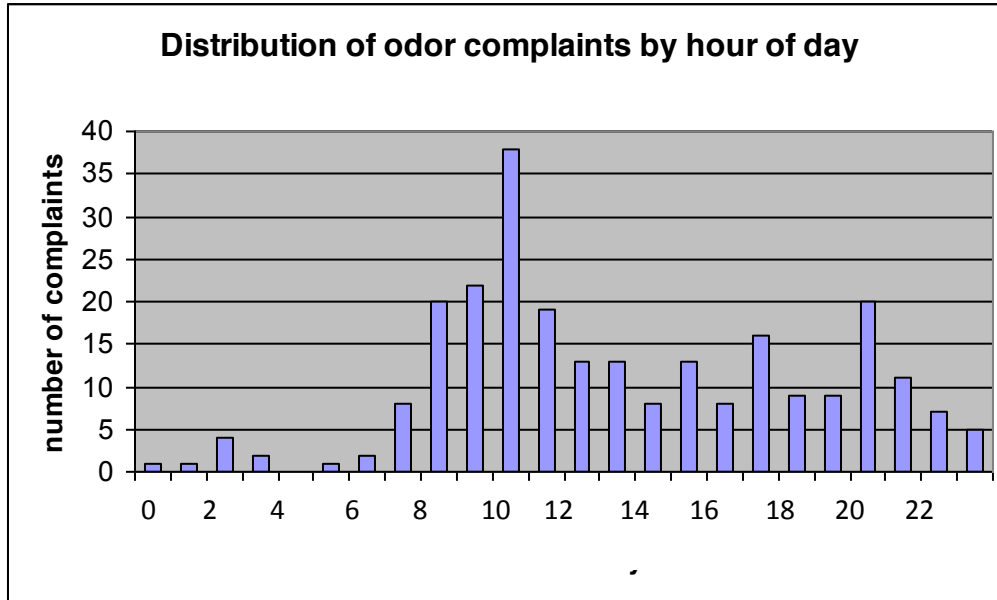


Figure 3: Distribution of odour complaints by hour of day, January 1, 2012 – May 31, 2013.

Notes: 1) Example: hour 10 is from 10:00 to 10:59.

2) Only the complaints for which Fraser Richmond had been identified as a “possible” source in the complaints spreadsheet were used in the analysis.

Nonetheless, Harvest should pursue a conservative operating plan with respect to the Auxiliary Screener, which combines careful operating practices, especially around movement of material from curing to screening, with close attention to odour measurements.

5.2. Progressive Mitigation

Based on our investigation of the data and consultations with experts around odour science and operations, Harvest should consider the following options and measures for reducing any objectionable odours, should they occur, from the operation of the auxiliary screener:

1. Minimize use of the Auxiliary Screener, relative to reliance on the (enclosed) Primary Screener.
2. Check to ensure that material to be processed through the Auxiliary Screener has been adequately cured. The Air Permit specifies timing and oxygen requirements. These should be met, at a minimum.
3. A misting system with deodorizer has been installed and must be used at all times during operation of the screener except when it is raining.
4. Schedule movement of material to the Auxiliary Screener during daytime and more unstable atmospheric conditions.
5. Avoid moving material from curing to screening and avoid operating the Auxiliary Screener during times when meteorological conditions increase the probability of causing offsite odours

such as warm and still night times, weekends and statutory holidays, atmospheric inversions, and constant wind speed and direction, especially from the east and south. During summer months, consider starting screening operations at dawn – though be careful to monitor odour impact and discontinue if complaints arise.

6. Correlate on-site odour measurements and reported off-site complaints, with timing, maturity of material to be screened, operating hours of the Auxiliary Screener and meteorological conditions to determine more and less favorable operating protocols. Adjust operations accordingly and re-measure.
 - The Odour Management Team should review this data at least monthly from July through September, or more frequently if necessary.
 - Thereafter, the Odour Management Team should determine an appropriate review schedule, based on experience.
 - Schedule review of available data and operational history as part of 2014 revision of this POMP.

7. The Odour Management Team should also investigate and consider supplemental fugitive dust mitigation systems to be used as back-up measures. These systems could include more extensive misting systems, dust fences, and temporary enclosures. The Odour Management Team should collect information on costs and effectiveness of these different measures and incorporate the results of its analysis in the next version of this POMP.

6. Literature & Relevant Literature

British Columbia. Ministry of Water, Land and Air Protection ; RWDI Air Inc ; RSS Consulting, Odor management in British Columbia: review and recommendations : final report. Surrey, B.C. : British Columbia Water, Land and Air Protection, 2005.

www.bcairquality.ca/reports/pdfs/odor_mgt_final_june13_05.pdf

Buyuksonmez, F. 2010. "Comparison of Mitigation Measures for Reduction of Emissions from Greenwaste Composting," San Joaquin Valley Air Pollution Control District.

California Integrated Waste Management Board. 2007. "Comprehensive Compost Odor Response Project", San Diego State University,

Das, K.C., 2000 "Odor Related Issues in Commercial Composting," Workshop presented at the Y2K Composting in the Southeast Conference & Expo, October, 2000, Charlottesville, VA.

Haug, R.T., 1993. *The Practical Handbook of Compost Engineering*. Lewis Publishers, CRC Press, Boca Raton, Florida.

Haug, R.T., 2004, "Elements of Odor Management". In *Odor Management at Composting Facilities*, J. G. Press, Emmaus, PA.



Oshins, C., 2006. "Composting Process." In: *On Farm Composting Handbook*, 2nd Edition, NRAES. Ithaca, NY. Unpublished draft.

Pennsylvania Department of Agriculture, Odor Management Program Guidance .

http://www.agriculture.state.pa.us/portal/server.pt/gateway/PTARGS_0_2_24476_10297_0_43/AgWebsite/Page.aspx?name=Odor-BMP-Reference-List&navid=11&parentnavid=0&pageid=59&

Richard, T.L., B. Hamelers, A. Veeken, and T. Silvia, 2002. Moisture relationships in composting processes. In *Proceeding of the 2002 International Symposium*, Columbus Ohio, May 2002.

Appendix A: Odour Measurement

A wide variety of odourants including volatile organic chemicals, alcohols, aldehydes, volatile fatty acids, ammonia and other nitrogen compounds, and various sulfur compounds exist in the urban environment from a wide variety of sources. Some or all of these may potentially come from this Facility as well. This section addresses how volatile odorous chemicals and their relative concentrations relate to the total odour quality. The factors of individual compound odour character or quality and their associated odour threshold are important in understanding the total picture when making odour observations. Then an evaluation of options for odour monitoring, process control and treatment can follow.

Odour field assessments require recording observations about the meteorology at a given point in time, what operations are in progress at the plant, and what odour intensity, odour duration, and odour hedonic tone (descriptors) is being observed. Odour Assessment Technicians at the Facility perform this valuable task.

Most local odour regulations define a nuisance odour as one that has such characteristics and during which unreasonably interferes with a person's enjoyment of life and property. Intensity, duration, and hedonic tone are three measures of whether an odour has the potential to be a nuisance.

There are a number of ways to record intensity and hedonic tone (time is easier to measure; *i.e.* in minutes). As background, this section presents one possible scale for use in measuring each.

Intensity

With regard to intensity the following scale can be used

- Level 0 – no odour detected
- Level 1 – odour barely detected (faint wisp)
- Level 2 – odour is detectible but not recognizable
- Level 3 – odour is recognizable but not easily identifiable
- Level 4 – odour is recognizable and hedonic tone is definite
- Level 5 – odour distinct and definite, any characteristics are mildly obvious
- Level 6 – odour distinct and definite, any characteristics are strongly obvious
- Level 7 – odour is objectionable or strong enough to be mildly offensive
- Level 8 – odour is objectionable or strong enough to be moderately offensive
- Level 9 – odour is objectionable or strong enough to cause attempts at avoidance
- Level 10 – odour is so strong that a person does not want to remain present

Appendix B: Biofilter Technology

This is an overview. Refer to operations guidance for more detailed information. Biofiltration is the use of microorganisms growing in a media bed to remove and oxidize odour compounds in a foul airstream. A typical biofilter consists of a media bed containing compost microorganisms, a media support structure, an air distribution system, and some method of controlling the biofilter moisture content.

This checklist serves as a guide to assist in developing a method of monitoring and operating biofilters.

- Check inlet gas temperature and media temperature, adjust fresh air intake if temperature is rising. ²
- Check to insure condensate has not accumulated in the filter sub-region
- Check the surface for crusty or dry spots
- Check the surface for settlement or low spots
- Check the surface steam pattern to see if there are dead spots
- Check the perimeter for significant steam patterns that may indicate leaks
- Analyze the media for physical and biological characteristics

Media maintenance and replacement are the most important elements for effective biofiltration. Media replacement can be initiated based on a media effective depth, observations of surface irregularities and exhaust odour, or based on back pressure measurements. All of these are reasonable approaches, and they can be used together if necessary.

A decision model for media exchange based on age, surface appearance, effective depth, exhaust quality, and backpressure is under development. This requires a procedure to record system characteristics and filtration performance. For example, if any of the model parameters exceed a selected specification (i.e. settlement is more than 1 meter, surface has dry spots, or the exhaust has odours present) the biofilter media should be replaced.

It should be noted that backpressure will be unique to each biofilter but trends over time can indicate problems, such as a gradually rising backpressure that consumes horsepower and reduces airflow. Depth and age are also closely correlated. If the biofilter loses too much effective depth, it generally also has reached an advanced age since the depth decreases over time. A biofilter log or record is used to record biofilter performance trends.

² NB, refer to section 2.1.6 for a discussion of this. Alternative cooling systems are being explored.